

# Nepal's First UPVC Roofing Sheet Manufacturer

ISO 9001:2015



नेपाली मन, नेपाली नै किनौ



नेपाली पनि, विश्वासिलो पनि



**Siddhartha Sunrise Industries Pvt. Ltd.**

☎ 01-5343720, 9801330000 🌐 [siddharthasunrise.com](http://siddharthasunrise.com)

✉ [siddharthasunrise350@gmail.com](mailto:siddharthasunrise350@gmail.com)

📘 [facebook.com/SiddharthaSunrise](https://facebook.com/SiddharthaSunrise) 📷 [@siddhartha\\_sunrise](https://www.instagram.com/@siddhartha_sunrise)


भिकाएको होइन  
यही बनाएको





# About Us

**Siddhartha Sunrise Industries Pvt. Ltd.** is Nepal's first UPVC roofing sheet manufacturer, located in Chipagarh, Rohini-04, Bhairahawa. We are pioneers in glass fiber mesh-reinforced technology, ensuring superior quality and performance. Our roofing solutions are the preferred choice for civil and industrial construction, delivering durability and innovation.

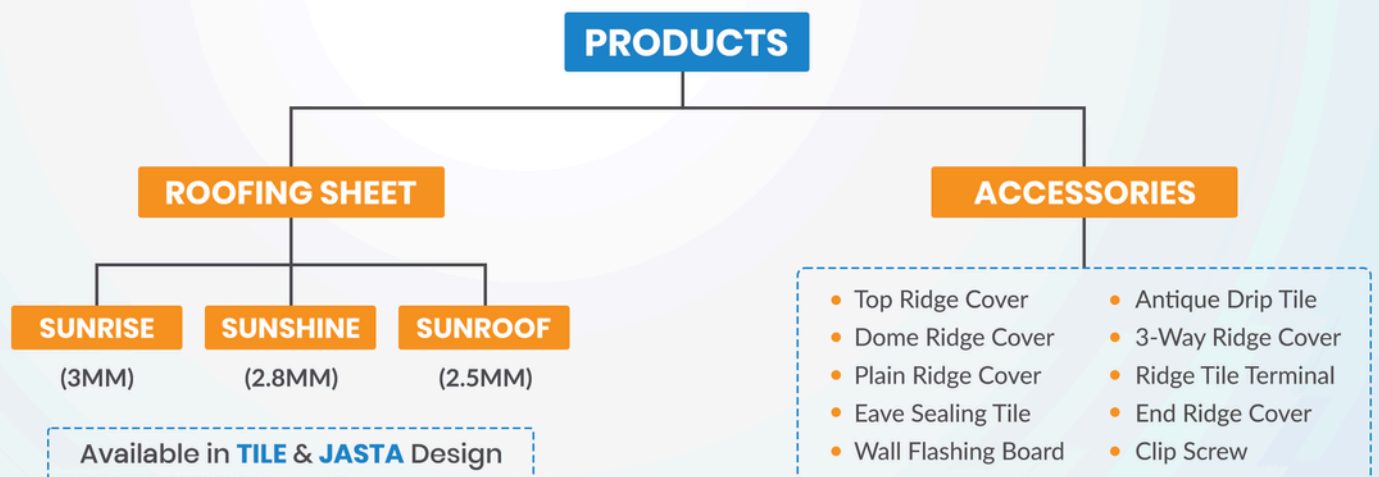

## SUNRISE UPVC 3MM

Double mesh reinforcement – Strong & impact-resistant


Heat & sound insulation – Comfortable & quiet

Corrosion & fire-resistant – Durable in all environments

10-year warranty – Long-lasting performance

TILE & JASTA designs – Stylish & functional

Max length: 18' 8"

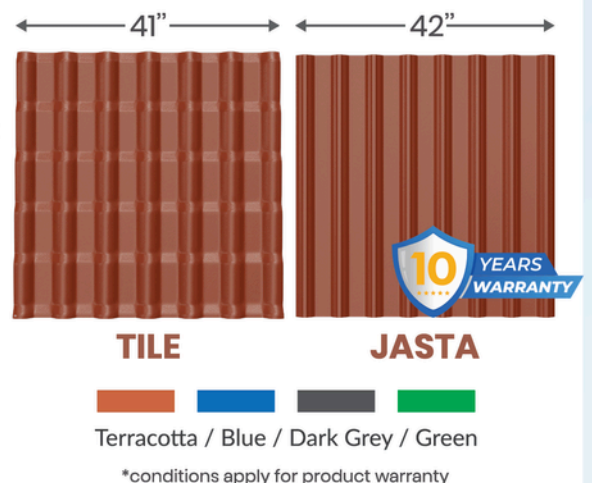

**TILE**

**JASTA**

Terracotta / Blue / Dark Grey / Green

\*conditions apply for product warranty

## SUNSHINE UPVC 2.8MM

Single mesh reinforcement – Strong yet lightweight

Ideal for low-impact areas – Durable & cost-effective


Heat & sound insulation – Comfortable & quiet

Corrosion & fire-resistant – All-weather protection

TILE & JASTA designs – Stylish & functional

Max length: 14' 4"

No product warranty – Budget-friendly option

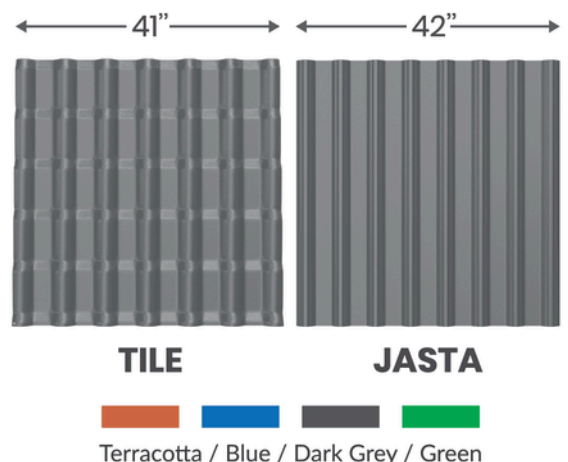

**TILE**

**JASTA**

Terracotta / Blue / Dark Grey / Green

## SUNROOF UPVC 2.5MM

Single mesh reinforcement – Strong yet lightweight

Durable & flexible – Resists cracking & bending


Heat & sound insulation – Comfortable & quiet

Corrosion & fire-resistant – Reliable in all environments

TILE & JASTA designs – Stylish & functional

Max length: 14' 4"

No product warranty – Best for low-risk areas

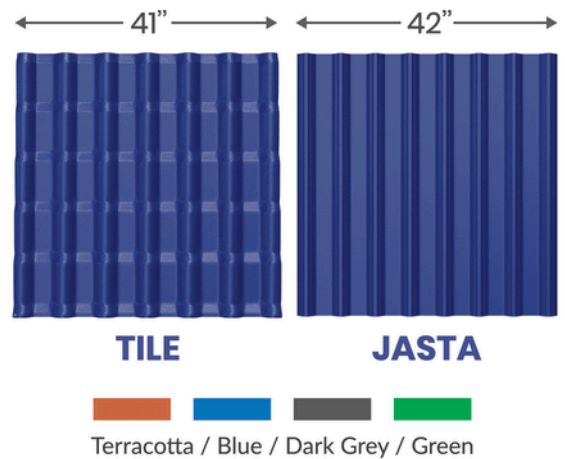

## ACCESSORIES



### Top Ridge Cover

Prevents water ingress and enhances roof waterproofing.



### Dome Ridge Cover

Protects domed roofs from weather while adding an aesthetic finish.



### Plain Ridge Cover

Flat design for standard roof ridges, ensuring coverage and protection.



### Eave Sealing Tile

Seals eave gaps to prevent air flow and water penetration.



### Wall Flashing Board

Ensures waterproofing at roof and wall junctions.



### Antique Drip Tile

Decorative tile that prevents water drips and protects the structure.



### 3-Way Ridge Cover

Connects multiple roof sections for a secure, waterproof seal.




### Ridge Tile Terminal

Seals the end of a ridge cover for a secure finish.



### End Ridge Cover

Closes roof ridge ends to prevent water penetration.



### Clip Screw

Securely fixes UPVC sheets with waterproof sealing.



## Features



Anti  
Corrosion



water & air  
leakage proof



Good  
Resale Value



less hot in  
summers


acid-alkali  
resistance




less space for  
overlapping



fire  
retardant



sound  
insulation



impact  
resistance



## Installation Procedure

### PURLIN DISTANCE

**Purlin distance** refers to the gap between two horizontal support beams where roofing sheets are fixed, ensuring stability and load distribution.

**600 to 800 (mm)**



### SLOPE

**Roof slope** refers to the angle at which the roofing sheet is installed for proper water drainage and stability.

**20° - 25°**

### CLIP / SCREWS

Use **4-5 clip screws** per m<sup>2</sup> for secure UPVC sheet installation.

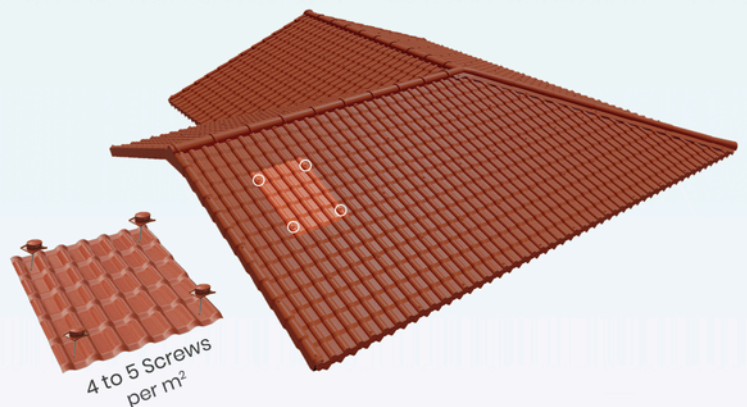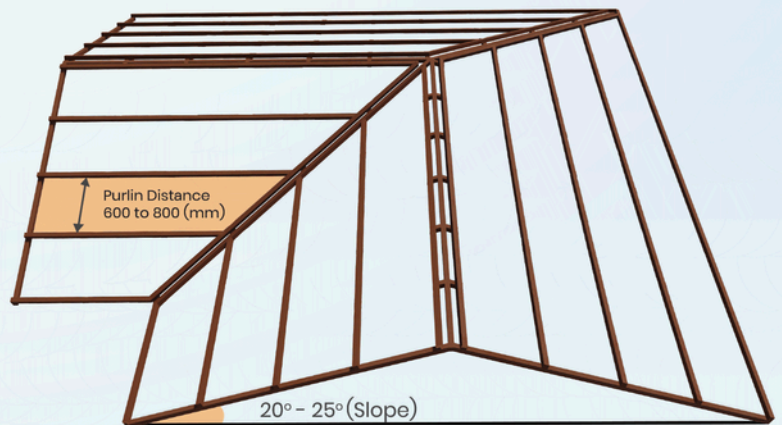



# TECHNICAL DATA

## SUNRISE UPVC 3MM

Weight: 5.5 to 6 kg per sq. meter

Strength: 35 Mpa

Thickness: 3mm  $\pm 5\%$

Bottom Colour: White

Top Colour :      
Terracotta / Blue / Dark Grey / Green



## SUNSHINE UPVC 2.8 MM


Weight: 5.3 to 5.5 kg per sq. meter

Strength: 32 Mpa

Thickness: 2.8mm  $\pm 5\%$

Bottom Colour: White

Top Colour :      
Terracotta / Blue / Dark Grey / Green

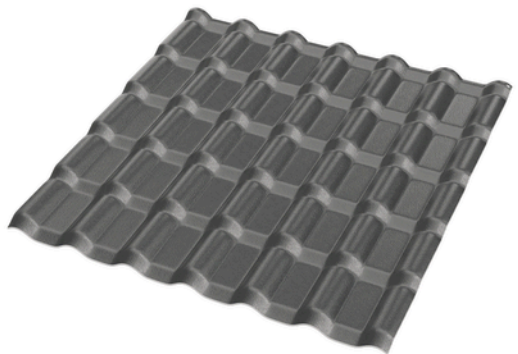

## SUNROOF UPVC 3MM


Weight: 5 to 5.5 kg per sq. meter

Strength: 30 Mpa

Thickness: 2.5mm  $\pm 5\%$

Bottom Colour: White

Top Colour :      
Terracotta / Blue / Dark Grey / Green

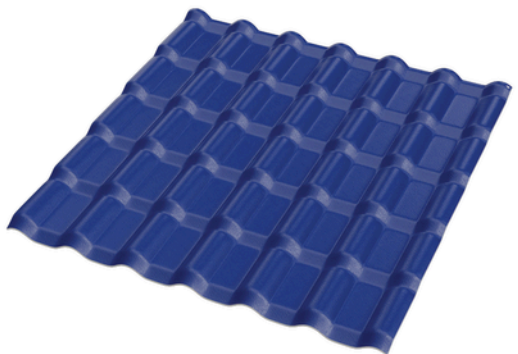

\*conditions apply for product warranty

## PRODUCT DIMENSIONS

LENGTH					BREADTH	
TILE			JASTA		TILE	JASTA
18'8"	16'6"	14'4"	18'	16'	41"	42"
12'2"	10'	9'4"	14'	12'		
8'8"	7'2"	6'6"	10'	9'		

\*Custom sizes available for bulk orders



Scan the QR code to view detailed sizes



# APPLICATION AREAS



Maharishi Vedic Institute



Balaju School of Engineering



Sundarijal Coverthall



Bhairahawa Airport



BYD Showroom, Naxal



Tribhuvan University



Osho Tapoban



Kalu Pandey Park



Pulchowk

## Accessories Overview

